

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 187 406 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
13.03.2002 Bulletin 2002/11

(51) Int Cl.7: H04L 12/56

(21) Application number: 01305643.7

(22) Date of filing: 28.06.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

• Stacey, Dave
Hertfordshire, SG12 8LL (GB)
• Gibson, Mark
Hertfordshire, CM23 5JG (GB)

(30) Priority: 28.06.2000 US 606052

(71) Applicant: Nortel Networks Limited
Montreal, Quebec H2Y 3Y4 (CA)


(74) Representative: Ryan, John Peter William et al
Nortel Networks
Intellectual Property Law Group
London Road
Harlow, Essex CM17 9NA (GB)

(72) Inventors:
• Mauger, Roy
Hertfordshire, WD7 7DD (GB)

(54) Label switched communications network

(57) A label switched path is determined in a communications multi-service network comprising a plurality of nodes interconnected via quality of service capable tunnels to provide a QoS guarantee for a session in which resource availability from the network edge to multiple central stages and resource availability from the

multiple central stages to the destination edge are established. A series of quality of service capable tunnels is selected by offering a plurality of candidate central stages to the destination edge and allowing the destination edge to select a complete path across the network. A label stack comprising a ser of four labels is attached to a payload to define a selected sequence of tunnels.

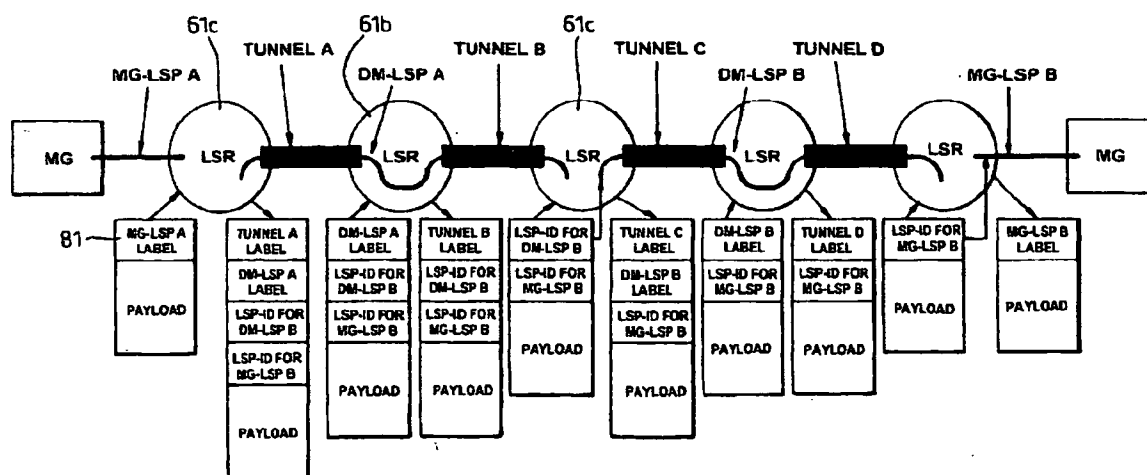

EACH TUNNEL IS ASSUMED TO PERFORM PENULTIMATE HOP
POPPING AT THE CORE LSR PRIOR TO THE VPN LSRs ILLUSTRATED
ABOVE

Fig. 9

Description

FIELD OF THE INVENTION

[0001] This invention relates to arrangements and methods for the switching or routing of traffic in a communication network

BACKGROUND OF THE INVENTION

[0002] Traditionally, two types of legacy telecommunication networks have been developed. The first type of legacy network is connection oriented and is used for the transport of narrow band voice traffic, typically carried in TDM frames. Such networks comprise for example synchronous or plesiochronous networks. The second type of legacy network is connectionless in nature and is used for the transport of broad band packet or cell-based data traffic. Such packet traffic includes for example Internet protocol (IP) traffic. There is currently a drive towards unified networks which provide end to end transport for both voice and data services, and to this end the use of asynchronous transport has been introduced. This of course introduces the problem of supporting different protocols over a common network.

[0003] Asynchronous Transfer Mode (ATM) is the technology specified by the ITU-T as a broadband network technology suitable for all applications. For Internet protocol traffic however, ATM has proven to be less than fully effective at supporting Layer 3 routed applications, such as routed virtual private networks. This has led the IRTF (Internet Research Task Force) to specify multi-protocol label switching (MPLS) as a technology which inherits the desirable characteristics of ATM but is better matched to the Internet protocol. In particular MPLS provides a frame merge function in which data frames received from multiple sources are captured and sent out with a common label. This is required for the support of Internet Protocol Layer 3 Routed services. Service providers would ideally prefer a single network technology to support all of the services that they provide as this would achieve the lowest possible operational cost.

[0004] A particular problem with the introduction of a multi-service network is that of accommodating the various transport protocols and, in particular, that of providing end to end quality of service guarantees for high priority traffic such as voice. In particular, there is a need to provide a network that can carry both data and voice traffic at a local, national and international level while utilising a common transport protocol. A further problem with such a network is that of real time management of the virtual public/private networks that are established within the network. At present, each VPN manager requires a detailed knowledge of the network topology. In a large network this is a very significant operational task.

SUMMARY OF THE INVENTION

[0005] An object of the invention is to minimise or to overcome the above disadvantages.

[0006] According to a first aspect of the invention, there is provided a method of routing an information packet over a label switched path between first and second end stations in a virtual public/private network defined over a network comprising a hierarchical arrangement of first, second and third levels of routers, the method comprising attaching to the information packet a sequence of labels indicative of a corresponding concatenated sequence of label switched path sections within the virtual public/private network, each said path section extending between a pair of said routers.

[0007] According to a further aspect of the invention, there is provided a communications network comprising a hierarchical arrangement of first, second and third levels of routers and over which one or more virtual public/private networks is defined, the network having a management system for routing packet traffic over a said virtual public/private network by attaching to each packet a sequence of labels indicative of a corresponding concatenated sequence of label switched path sections within the virtual public/private network, each said path section extending between a pair of said routers.

[0008] In our co-pending application serial number 09/xxxx (118621DMAuger), the use of a, the use of a two-layer MPLS network in order to simplify the management of Virtual Public/Private Networks (VPN) is described. In the present application, the use of a four-label stack provides connection oriented behaviour for voice traffic whilst retaining strict edge control analogous to standard IP network operation. The use of a three layer, five stage hierarchical network of routers enables the technique to be employed over an international or global network.

[0009] In a preferred embodiment, a four-label stack at the edge of the network is utilised to achieve end-to-end connection oriented behaviour with guaranteed Quality of Service (QoS) whilst requiring no further control actions on the network. The four-label stack provides sufficient control to establish a required connection end to end across the network.

[0010] Advantageously, a virtual private/public network is defined with multiple stages of constraint-based routed label switched paths.

[0011] Multi-protocol label switching (MPLS) is the preferred network routing protocol employed herein. MPLS has been defined by the IETF so as to be substantially independent of the underlying transport mechanism. Mappings on to ATM have been defined as well as frame-mode networks using HDLC (High-level data link control) based or other forms of frame transport.

[0012] MPLS includes the concept of stacked labels. We have found that this concept allows the network arrangements described herein to operate at multiple layers. For instance a first label in the stack can relate to a

traffic trunk. A switch which only swapped this first label would handle the traffic trunk transparently. A switch which popped the first label, swapped the second label and pushed a new first label would be switching a service instance between two traffic trunks. In a particularly advantageous embodiment, a four label stack is used to establish a connection across a five-stage network in which the only per-connection control action is to assert the four-label stack at the first node of the five-stage network.

[0013] In a further aspect, the invention provides a method of selecting a series of tunnels to provide a QoS guarantee for the session in which resource availability from the edge to multiple central stages is known as well as resource availability from the multiple central stages to the destination edge. The selection is made by offering a number of candidate central stages to the destination edge and allowing the destination edge to select the complete path.

[0014] Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] Preferred embodiments of the invention will now be described with reference to the accompanying drawings in which:-

Figure 1 is a schematic diagram of an exemplary virtual public/private network;

Figure 2 shows the construction of an abstract node employed in the network of figure 1 and illustrates the network construction in further detail;

Figure 3 shows an exemplary Layer 1 management and bearer control architecture;

Figure 4 illustrates a virtual public/private network information model;

Figure 5 illustrates the concept of a Dynamic Multiplex Label Switched Path;

Figure 6 illustrates a virtual public/private network structure according to a preferred embodiment of the invention;

Figure 7 illustrates the use of a COPS mechanism in the network of figure 6;

Figure 8 illustrates a schematic representation of the network of figure 6 demonstrating its scalability;

Figure 9 illustrates the label processing functions at

each node of the network of figure 6; and

Figure 10 illustrates the use of control functions of the network of figure 6 to guarantee connection oriented behaviours of the end-to-end path.

DESCRIPTION OF PREFERRED EMBODIMENTS

[0016] Referring first to figure 1, which is introduced for explanatory and comparative purposes, this figure illustrates in highly schematic form an exemplary virtual public/private network (VPN) deployed nationally or regionally in order to provide session switched multimedia services on a territorial basis. The network comprises a number of service nodes 11, located at the main centres of population, inter-linked via a network of core nodes by quality-of-service (QoS) capable tunnels 12. The construction of the core network will be described below. In figure 1, only one core node 18 is shown in the interests of clarity, but it will of course be appreciated that the network will incorporate a plurality of core nodes. Access to the network from user terminals 13 is provided via media gateways 14 each serving to one or more service nodes. Traffic is transported on constraint-based routed label switched paths (CR-LSP) 15 established between respective gateways. The network carries packet traffic, each packet 16 comprising a payload and first and second labels (Label1, Label2) indicative of the path over which the packet is to be routed.

[0017] CR-LSPs (constraint-based routed label switched paths) are deployed between the service nodes 11 of the network. Services such as inter-active voice, requiring strict QoS guarantees are supported by end-to-end CR-LSPs 15 as illustrated in figure 1. To take a simple example of QoS support, if all of the CR-LSPs at both traffic-trunk level and end-to-end are constant bit rate, then the performance of the end-to-end CR-LSP can be substantially equivalent to ATM-AAL1 (Asynchronous Transfer Mode Adaptation Layer One) assuming a typical 48-byte packetisation.

[0018] The IETF has defined two protocols for the establishment of CR-LSPs. These protocols are RSVP-Traffic Engineering, and Constraint-routed Label Distribution Protocol. CR-LSPs (constraint-based routed label switched paths) are point-to-point paths between designated network nodes. Such paths are each assigned a traffic contract which, in suitable carrier strength implementations, will be policed for conformance. The following description of the best method of performing the invention is based on the CR-LDP protocol, but it will be appreciated by those skilled in the art that the RSVP-TE protocol has equivalent functionality and can be used to serve the same purpose. Such a CR-LSP (constraint-based routed label switched path) has an LSPID (label switched path identifier) which can be used to specify a hop in a CR-LDP request. In such a case the new CR-LSP will be multiplexed into the specified CR-LSP and allocated a second level label. It

is therefore possible to specify within the network of figure 1 a virtual public/private network (VPN) with multiple stages of first level CR-LSPs and to provide end-to-end services having a CR-LSP traffic contract.

[0019] A feature of the constraint based routed label distribution protocol (CR-LDP) employed in the network of figure 1 is the use of an "abstract node" to define routing constraints. An abstract node consists of a sub-network of real nodes (core nodes) over which the constraint based routed label distribution protocol is allowed to select any available path to achieve a requested connection. Thus in a path specified as (real node A - abstract node B - abstract node C - real node D) there may be multiple real nodes in each of the abstract nodes, and there may also be multiple trunks between the abstract nodes. This concept of abstract nodes simplifies the management of a VPN as the network manager only requires a view of the network at the abstract node level and does not require detailed view of the construction or internal operation of an abstract node.

[0020] Referring now to figure 2, which is also introduced for explanatory and comparative purposes, this depicts in schematic form a portion of the network of figure 1. Figure 2 is a representation of a simple network in its abstract node form, together with a possible real network realisation of one of the abstract nodes.

[0021] The network represents groups of multiple service nodes (SN) 11 each arranged around a respective abstract node (AN) 22 in each of four locations. One of the abstract nodes 22 is shown in detail to illustrate its construction from a sub-network of four core nodes (CN) 18 with multiple transport links 23 therebetween. In the network of figures 1 and 2, an abstract node is defined by an IP address prefix, and all core nodes which include that prefix in their IP address are treated as part of that abstract node. It will of course be understood that an abstract node may be constructed from some other number of core nodes. Further, abstract nodes can have a temporary, semi-permanent or permanent existence depending on the network requirements.

[0022] Constraint based routed label switched paths 15 are deployed between service nodes 11 via the intervening abstract nodes 22.

[0023] In the arrangement of figures 1 and 2, it is relatively simple for a management system controlling the real network to produce an abstract node version of its information model for use on a super-ordinate network manager. It is also relatively easy to produce a graphical representation of such a network and to specify traffic trunks by defining paths between service nodes and passing through abstract nodes. These graphical paths can then be used to automatically construct CR-LDP requests to establish the traffic trunks. CR-LDP can run on an existing constraint-based routed label switched path (CR-LSP) to renegotiate the traffic contract so that the technique provides for near real-time creation of VPNs as well as flexible service level agreements which

can be modified e.g. on a diurnal basis or on any basis which suits the customer traffic profile.

[0024] A management and bearer control function for the Layer 1 physical network of figures 1 and 2 is illustrated in figure 3. This figure shows by way of example a simple network based on a group of core nodes 18, constituting an abstract node 22, and service nodes 11. The real network has a management system based on a hierarchical structure of element managers 31 and (sub) network managers 32. The (sub) network manager 32 is responsible for constructing the abstract node information model representation of the network, which information is passed to a super-ordinate manager 33. A sub-ordinate manager 36 provides virtual switch management to perform fault, configuration, accounting, performance, and security management. The super-ordinate manager 33 is used for defining VPNs and placing traffic trunks to realise those VPNs. The super-ordinate manager also creates, modifies and deletes virtual switches. Traffic trunk requests are passed to bearer control Layer 1 (34) to initiate the CR-LDP process. This is the interface point for MPLS Layer 1 Bearer Control for which the common open policy service protocol (COPS) is preferred.

[0025] The information model illustrated in figure 4 for the sub-network manager 32 is also simplified in that only the Layer 2 virtual switches (VS) 41 are visible. These virtual switches are configured with access ports 42 to which users are connected and traffic trunks 43 configured end-to-end and provisioned with SLAs.

[0026] In figure 5 the concept of a dynamic multiplex label switched path (DM-LSP) according to a preferred embodiment of the invention is illustrated. In the exemplary network of figure 5, a hierarchical three layer arrangement of local nodes 51a, regional nodes 51b and international nodes 51c is provided, each node comprising a label switched router. Within the three layer network of MPLS label switched routers (LSR) 51a, 51b, 51c, a mesh of Layer 1 label switched paths (LSPs) 52 is established. As described above it is possible to define the constraints for a new label switched path (LSP) in terms of existing LSPs, in which case a Layer 2 LSP is established and a second level label defines the embedded CR-LSP. In the dynamic multiplex-LSP arrangement of figure 5, a third level label is defined which relates to one of a number of sessions which can be dynamically multiplexed onto the same label switched path (LSP). In our arrangement depicted schematically in figure 5, a new session may be multiplexed onto the dynamic multiplex -LSP if and only if the resource constraints of the ingress and egress Layer 1 CR-LSPs are satisfied. The checking of these constraints can be performed in the first and third stage LSRs (label switched routers) 51 a, 51c, which have full visibility of the resources committed to the ingress and egress Layer 1 LSPs respectively. The Layer 2 LSRs 51b perform an implicit switching function in that sessions may be dynamically routed between first and third stage LSRs

51a, 51c, using any available Layer1 CR-LSP, but the second stage LSRs 51b are not involved in the control process. Figure 5 also illustrates a number of LSRs which are used to route the Layer 1 CR-LSPs. These are additional network stages that may be required for the traffic management of large numbers of VPNs, but they need not be directly involved in the operation of the DM-LSPs.

[0027] An exemplary five-stage virtual private network (VPN) with four-layer label control is illustrated in figure 6. The network comprises a hierarchical or layered structure of local tandem routers 61a, national tandem routers 61b and tandem routers 61c. A super-ordinate manager 60 is responsible for configuring one or more virtual private networks within the network structure of figure 6. This VPN configuration is performed by defining the Layer 1 LSPs (label switched paths) in terms of service level agreements and constraints for their routing through the network. This information is formulated as a COPS (Common Open Policy Service) command which is pushed down to the label switch router (LSR) 61a which forms the ingress of the requested CR-LSP. The super-ordinate manager 60 also pushes the COPS commands to an admission manager (AM) 64 within media gateway controller 65, which admission manager records resources available for use in service requests, the admission manager 64 then pushes the COPS messages down to the label switched routers (LSRs) 61a, 61b, 61c, where they are used to invoke RSVP-TE or CR-LDP sessions in order to establish the virtual private network (VPN). The super-ordinate manager 60 then establishes a mesh of DM-LSPs (dynamic multiplex label switched paths) 66 between all of the local label switch routers 61b and all of the national tandem label switch routers 61c. This mesh establishes a network in which a constraint-based routed label switched path (CR-LSP) between any two local label switch routers can be specified by a pair of DM-LSPs (dynamic multiplex label switched paths). For a full mesh configuration, there are as many alternative routes between each pair of local label switch routers as there are national tandem label switch routers deployed in the network. After the super-ordinate manager 60 has configured the core network, the admission manager 64 configures a set of label switched paths between the media gateway 67 coupled to user terminal 68 and the local LSR node 61a. When a media gateway controller 65 wishes to establish a session with QoS guarantees it requests its associated admission manager 64. A session request may be initiated directly by a session control protocol such as Q1901 or SIP, or it may be initiated as a result of intercepting an RSVP message. Communication between the media gateway controllers advantageously uses a protocol which is able to tunnel connection control information such as Q1901, SIP or RSVP. The connection control information which is tunnelled between media gateway controllers is a list of label switched path identifiers (LSP-IDs). In the for-

ward direction this information comprises a list of candidate dynamic multiplex label switched paths (DM-LSPs) which are suitable to access a national tandem together with an LSP-ID (label switched path identifier) for the media gateway (MG) to local LSR connection. In the reverse direction the control information comprises a list of the four LSP-IDs selected to form the end-to-end connection. I.e. MG-Local LSR, Local LSR-National Tandem LSR, National Tandem LSR-Local LSR, Local LSR-MG. The scheme may be operated separately for each direction of transport or bi-directional operation could be chosen. The five-stage network of figure 6 accommodates long distance or global traffic; fewer stages would be required for local services. On receipt of the list of the four LSP-IDs defining an end-to-end connection, the admission manager 64 uses COPS to push the list down to the local node 51a for routing to the far-end media gateway 67a. The Local LSR response is to push four labels on to all packets received from the label switched path (LSP) identified as the connection from the local media gateway and then to forward the labelled packets. The media gateway may use labels internally, in which case the payload from the perspective of the Local LSR 61a will contain labels of significance only to the two media gateways involved. The first two labels are the two associated with the dynamic multiplex-LSP to the national tandem router 61b, which labels were allocated when the virtual private network was configured, and are stored in the local LSR 51a as related to its LSP-ID. The next two labels receive special treatment. An LSP-ID is intended for use as a network wide significant identifier for use in management systems as well as in LSRs. This LSP-ID comprises the IP Address of the ingress node of the CR-LSP as well as a sixteen bit locally significant identifier within that node. This locally significant identifier is sufficient to identify the DM-LSP from the National Tandem LSR 61b to the destination Local LSR 61a and from the Local LSR to the media gateway. These LSP-ID local identifiers are therefore used as the third and fourth labels and are treated as indirect addresses at the national tandem and local LSRs respectively.

[0028] We have found that a network having three hierarchical levels of routers is effective in providing international or global coverage, and that a virtual private network may be defined therein as a sequence of quality of service (QoS) tunnels each established between routers of adjacent hierarchical levels. In such a virtual private network, a stack of four labels will always be sufficient for the identification of a end to end path across the network.

[0029] The process of the COPS (Common Open Policy Service) protocol referred to above allows the policy being applied to a particular controlled flow on an MPLS router to be asynchronously updated. That is, the MPLS router is told how to change the treatment it applies to the flow, without first asking to change it. This process is underpinned by the use of ClientHandles to identify

the flow. When the path for a new flow is received at an admission manager, a COPS Decision (DEC) message is pushed, that uses the ClientHandle associated with the outermost LSP. This performs the selection of the first layer ER-LSP. Contained within this DEC message is the list of paths over which the flow is to be routed. This list will include the LSP-ID of the near-end dynamic multiplex, the LSP-ID of the far-end dynamic multiplex and the LSP-ID of the connection from the far-end local switch to the destination media gateway.

[0030] To facilitate the transfer of this information, a preferred embodiment of the invention defines a new COPS Specific Object. This object is shown schematically in figure 7. The object uses the existing COPS Specific Object pattern and has a CNum of 40 and CType of 2. The CNum is the identifier for the object, and the CType is the instance of the object. The object contains the list of LSP-IDs for the flow in the order in which they are to be used. Therefore LSP-ID 1 indicates the near-end dynamic multiplex and will be translated at the Local LSR into a two-tier label stack. Note that although the Clienthandle identifies the layer 1 trunk, this trunk and the dynamic multiplex share the same LSP-ID space at the local router and therefore LSP-ID 1 can easily identify the correct label stack. LSP-ID 2 will contain the LSP-ID of the second dynamic multiplex and LSP-ID 3 will contain the LSP-ID of the last hop from the far-end Local LSR to the media gateway. These next two values are the full forty eight-bit LSP-IDs. In order that these two values should be copied in the same order into each packet in this flow as defined above, they must undergo suitable translation. As is illustrated in figure 7, each LSP-ID consists of a thirty two-bit IP address and a sixteen-bit LSP number. It is the sixteen bit LSP number that is of interest so each LSP-ID must have the IP address removed and replaced with four leading zeros. This makes use of the fact that inserting leading zeros on a binary number leaves the value of that number the same i.e. $1101 = 0000\ 1101$.

[0031] With this translation performed, the LSP-IDs should be inserted in the same order as they occur in the COPS message, into the header of each packet in this flow at the Local LSR. That is, LSP-ID 3 should be the innermost of the labels. Once this is successfully completed, a Report State (RPT) message is sent back, indicating that the new session has been successfully installed.

[0032] By analogy with the PSTN, five stages of switching are considered desirable for QoS capable networks leading to Local/Local-Tandem/National-Tandem/Local-Tandem/Local routing for national services and Local/Local-Tandem/International-Tandem/Local-Tandem/Local routing for international services.

[0033] By way of example of the efficacy of the techniques described above, consider a carrier having 50 million customers in the USA and a further 50 million customers in the rest of the world with 0.1 Erlang of session traffic per customer. Assume that typically 40% of

traffic is long distance and 10% of traffic is International. The United States network could be organised with e.g. five hundred local nodes with typically 100,000 customers each. The Local-Tandems could be disposed in e.g. fifty groups with two switches in each group dedicated to National and International traffic. Approximately one hundred national-tandems and twenty five international-tandems would be deployed throughout the world to provide a global network. In this scheme the local nodes would typically support only 10,000 Erlangs and no tandem node would need to support more than 25,000 Erlang of session traffic. These are trivial amounts of traffic by modern standards and this readily demonstrates the flexibility and efficacy of the five-stage network described herein. The connectivity of such a network is illustrated schematically in figure 8. The nodes 71a, 71b, 71c as illustrated in figure 8 are typically virtual nodes, and it will be appreciated that a real physical switch could support a number of such virtual nodes.

[0034] The label processing in each of the five nodes is illustrated schematically in figure 9. As shown in this figure, the Local LSR 61a receives a packet with the label 81 assigned to the MG-LSP A at configuration time. The payload is retrieved and four labels are pushed: These four labels comprise the information, Tunnel A Label/DM-LSP A Label/LSP-ID of DM-LSP B/LSP-ID of MG-LSP B. Assuming penultimate hop popping, then the packet received by the local tandem node 61b is headed by the DM-LSP A Label. As this is the penultimate node for the DM-LSP A, its label is popped. The payload and remaining labels are then sent out on Tunnel B with Tunnel B Label. Again with penultimate hop popping the packet received by the national tandem 61c is headed by the LSP-ID of DM-LSP B this label is consumed to identify DM-LSP B and the label pair Tunnel C Label/DM-LSP B Label are pushed. At the distant local tandem, the DM-LSP B Label is recognised as a penultimate hop for DM-LSP B and is thus popped. The payload and remaining labels are sent out on Tunnel D with Tunnel D Label. At the destination local LSR 61a, the packet is headed by the LSP-ID of MG-LSP B, this is consumed in identifying MG-LSP B and the packet is delivered to the media gateway with MG-LSP B Label which was established when MG-LSP B was configured.

[0035] The overall control environment for five-stage MPLS networks is illustrated in figure 10. Each admission manager 64 associated with a media gateway controller 65 maintains a regular dialogue with the dynamic multiplex -LSP control functions in the national and international tandems. On a routine basis, the admission manager informs the DM-LSP control of its current utilisation of resources on a particular dynamic multiplex -LSP. This allows the dynamic multiplex -LSP control to evaluate the resource utilisation on the hidden tunnel (i.e. egress from local LSR to national tandem or ingress from national tandem to local) for this dynamic multiplex -LSP and to offer an explicit allocation of resources to

the admission manager for the next control interval. Assuming typical session holding times equivalent to current PSTN practice of about 120 seconds, then control intervals of 10 or 20 seconds would be appropriate. When a session request arises, the admission manager on the originating side is able to select an MG-LSP A and to nominate candidate dynamic multiplex -LSPs Ax, Ay, Az which have sufficient allocated resource for the session. The terminating side admission manager is now able to define the LSP-ID tuple for the connection by inspecting candidate dynamic multiplex -LSPs Bx, By, Bz. After selection, the admission manager offers MG-LSP A/DM-LSP A/DM-LSP B/MG-LSP B, this is then used by the admission manager to push the end-to-end connection. If the DM-LSP control function is cautious in allocating resources to admission managers, then the whole process is deterministic and the Layer 1 tunnels are never overloaded. Thus, with wirespeed operation of all LSRs and CBR contracts for the Layer 1 tunnels, end-to-end MPLS services behave as a substantially exact equivalent to end-to-end ATM CBR traffic. This assumes that all physical ports between nodes are at OC12/STM4 or higher speeds and that the normal packet size of IP of 1500 bytes is not exceeded.

Claims

1. A method of routing an information packet over a label switched path between first and second end stations in a virtual private network defined over a network arrangement comprising a hierarchical arrangement of levels of routers, the method comprising attaching to the information packet at a network edge a sequence of labels indicative of a corresponding concatenated sequence of label switched path sections within the virtual private network, each said path section extending between a pair of said routers.
2. A method as claimed in claim 1, **characterised in that** said network has hierarchy of first, second, third levels of routers.
3. A method as claimed in claim 1 or 2, **characterised in that** said sequence of labels comprises first, second, third and fourth labels.
4. A method as claimed in claim 1 2 or 3, **characterised in that** each said virtual private network is defined by a network of quality of service capable tunnels each disposed between a respective pair of routers.
5. A method as claimed in any one of claims 1 to 4, **characterised in that** said first label defines a route from a first level router to a second level router, said second label defines a route from the second level router to a third level router, said third label defines a route from the third level router to a further second level router, and said fourth label defines a route from the further second level router to a destination first level router.
6. A method as claimed in claim 5, **characterised in that** said label switched path sections are incorporated in dynamic multiplexed label switched paths comprising first-stage and second Layer 1 constraint-based routed label switched paths.
7. A method as claimed in claim 6, **characterised in that** a new session is multiplexed on to a said dynamic multiplexed label switched path only if the resource constraints of the first-stage and second-stage Layer 1 constraint-based routed label switched paths are satisfied.
8. A method as claimed in claim 7, **characterised in that** the labels defining the sequence of tunnels are assigned during tunnel establishment.
9. A method as claimed in claim 8, **characterised in that** the labels defining the sequence of tunnels each identify a respective tunnel by means of a label switched path identifier.
10. A method of selecting a series of tunnels between a source edge and a destination edge in a communications network having multiple central stages to provide a path having a quality of service guarantee, wherein resource availability from the source edge to the multiple central stages and from the multiple central stages to the destination edge is established, and wherein the selection is made by offering a number of candidate central stages to the destination edge and allowing the destination edge to select the complete path.
11. A method as claimed in claim 10, **characterised in that** said network has a hierarchy of first, second and third levels or routers.
12. A method as claimed in claim 11, **characterised in that** said path selection is identified by a stack of labels comprising first, second, third and fourth labels, and wherein said label stack is attached to an information packet routed on the selected path.
13. A method as claimed in claim 12, **characterised in that** said first label defines a route from a first level router to a second level router, said second label defines a route from the second level router to a third level router, said third label defines a route from the third level router to a further second level router, and said fourth label defines a route from the further second level router to a destination first level

router.

14. A communications multi-service network comprising a plurality of nodes interconnected via quality of service capable tunnels and incorporating a frame-mode MPLS architecture, wherein end-to-end QoS guaranteed services are provided by defining a label stack which delivers packets through a concatenated sequence of tunnels defined by successive labels in the label stack.

15. A communications network as claimed in claim 14, **characterised in that** said concatenated sequence of tunnels comprises label switched path sections incorporated in dynamic multiplexed label switched paths comprising first-stage and second-stage Layer 1 constraint-based routed label switched paths.

16. A communications network as claimed in claim 11, **characterised in that** a new session may be multiplexed onto a said dynamic multiplexed label switched path only if the resource constraints of the first-stage and second-stage Layer 1 constraint-based routed label switched paths are satisfied.

17. A communications multi-service network as claimed in claim 14, 15 or 16, **characterised in that** said network comprises a three layer a five-stage MPLS network, and that a stack of four labels is used to define a sequence of four tunnels.

18. A communications network comprising a hierarchical arrangement of first, second and third levels of routers and over which one or more virtual private networks is defined, the network having a management systems for routing packet traffic over a said virtual private network by attaching to each packet a sequence of four labels indicative of a corresponding concatenated sequence of label switched path sections within the virtual private network, each said path section extending between a pair of said routers.

19. A communications network as claimed in claim 18, **characterised in that** the first level routers comprise local routers, the second level routers comprise local tandem routers and the third level routers comprise national tandem routers.

20. A communications network as claimed in claim 18 or 19, **characterised in that** user access to the network is provided via a media gateway.

21. A method of determining a label switched path in a communications multi-service network comprising a plurality of nodes interconnected via quality of service capable tunnels to provide a QoS guarantee for a session in which resource availability from the

network edge to multiple central stages and resource availability from the multiple central stages to the destination edge are established, the method comprising; selecting a series of said quality of service capable tunnels, wherein said tunnel selection is made by offering a plurality of candidate central stages to the destination edge and allowing the destination edge to select a complete path across the network.

22. A method as claimed in claim 21, **characterised in that** said network has a hierarchy of first, second and third levels or routers.

23. A method as claimed in claim 22, **characterised in that** said sequence of labels comprises first, second, third and fourth labels.

24. A method as claimed in claim 23, **characterised in that** said network is defined by a network of quality of service capable tunnels each disposed between a respective pair of routers.

25. A method as claimed in claim 24, **characterised in that** said first label defines a route from a first level router to a second level router, said second label defines a route from the second level router to a third level router, said third label defines a route from the third level router to a further second level router, and said fourth label defines a route from the further second level router to a destination first level router.

26. A method as claimed in claim 25, **characterised in that** said label switched path sections are incorporated in dynamic multiplexed label switched paths comprising first-stage and second-stage Layer 1 constraint-based routed label switched paths.

27. A method as claimed in claim 26, **characterised in that** a new session is multiplexed on to a said dynamic multiplexed label switched path only if the resource constraints of the first-stage and second-stage Layer 1 constraint-based routed label switched paths are satisfied.

28. A method as claimed in claim 27, **characterised in that** the labels defining the sequence of tunnels are assigned during tunnel establishment.

29. A method as claimed in claim 28, **characterised in that** the labels defining the sequence of tunnels each identify a respective tunnel by means of a label switched path identifier.

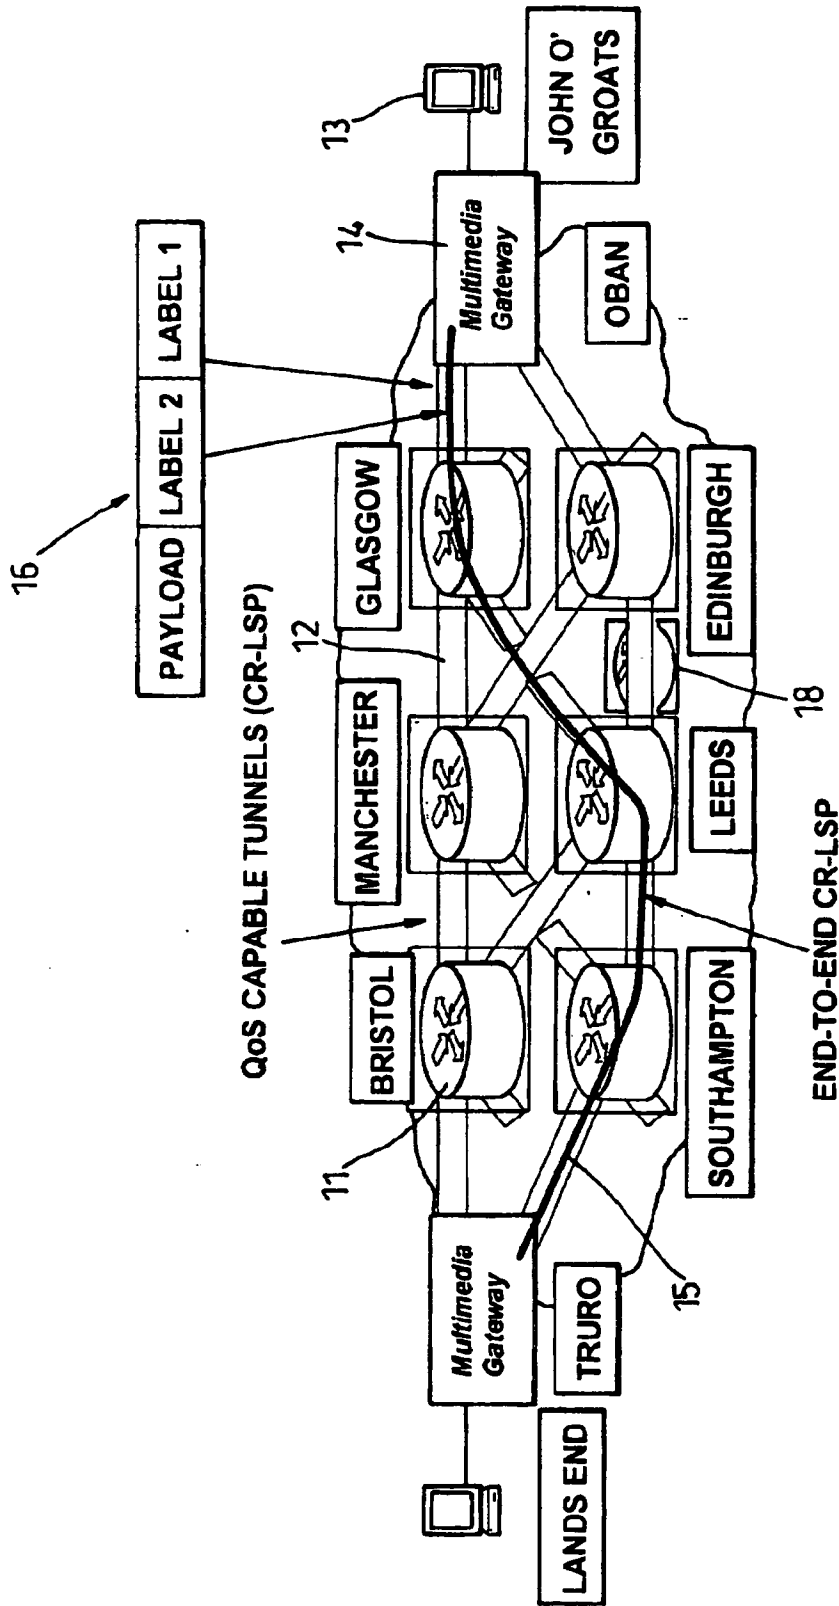


Fig. 1

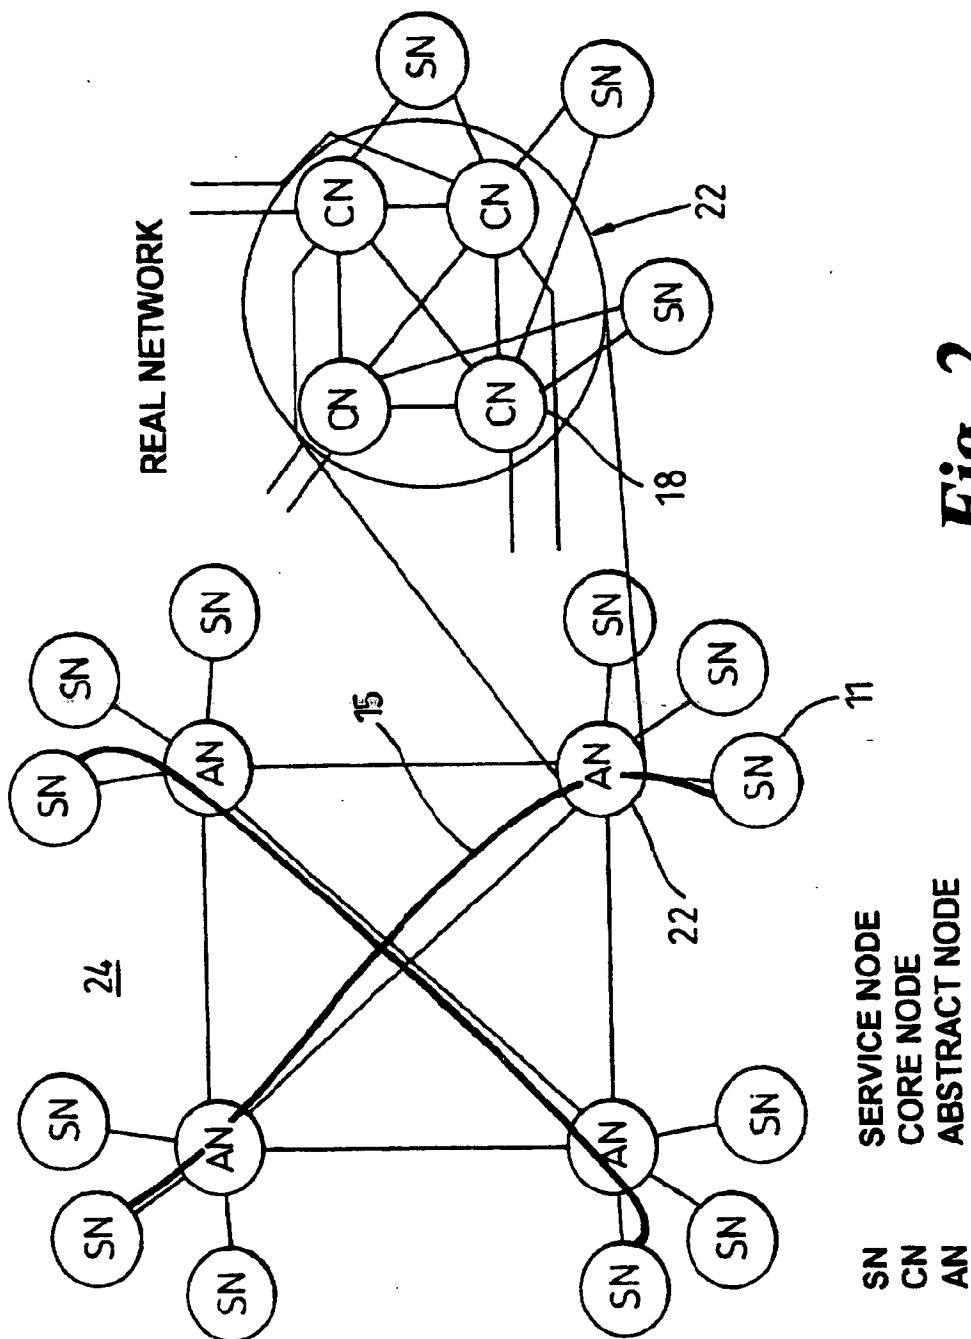


Fig. 2

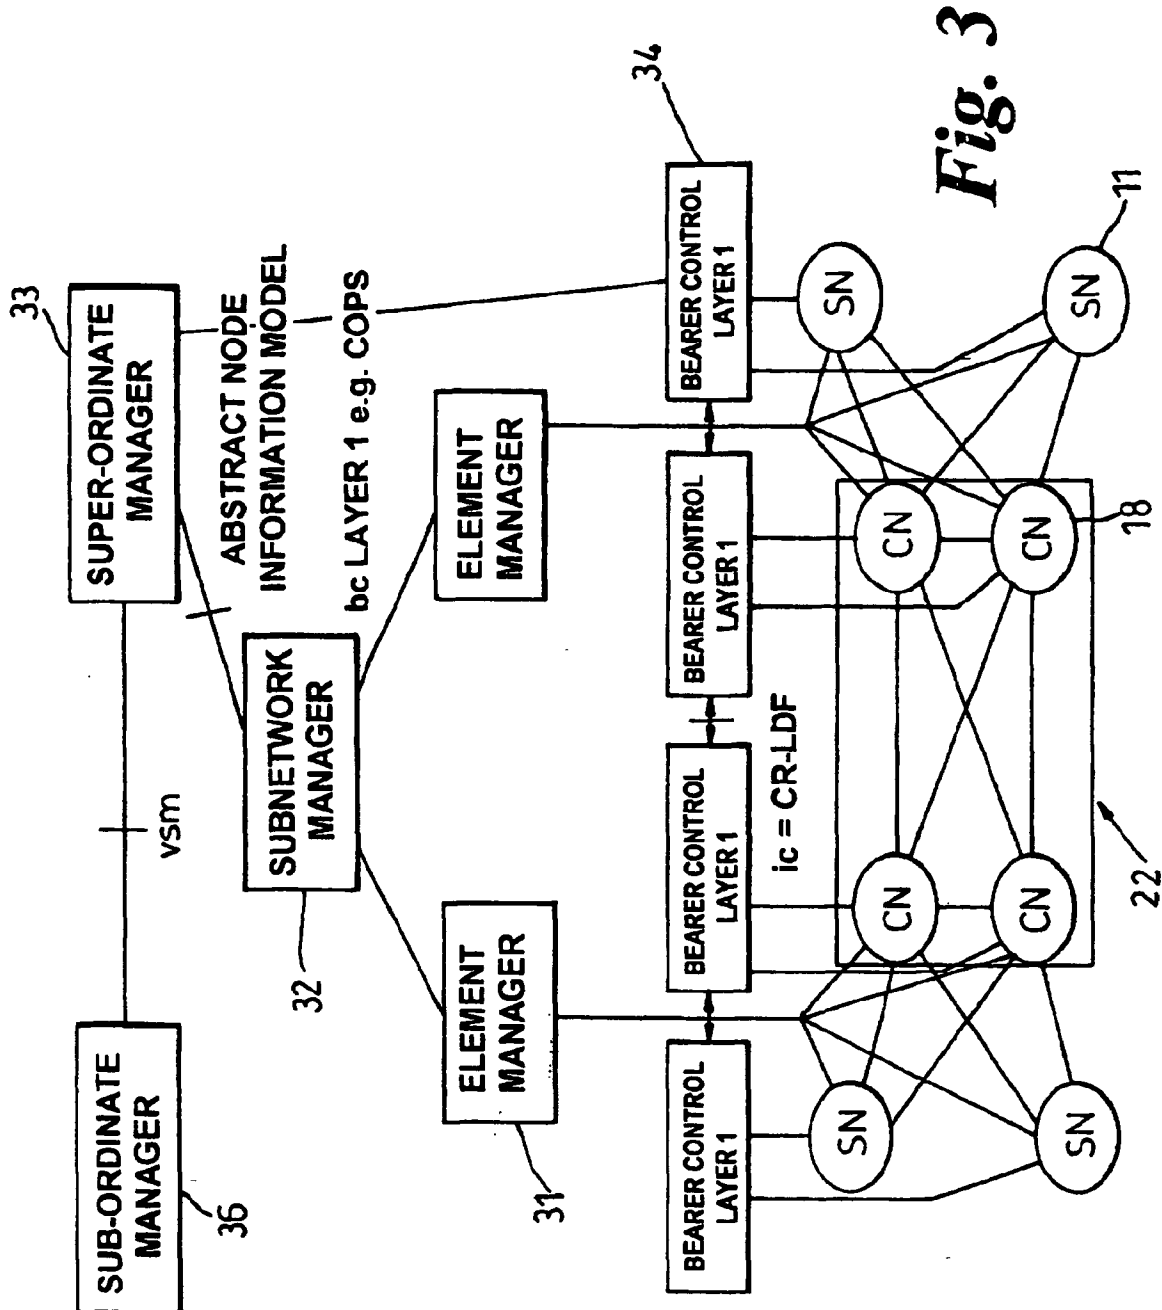


Fig. 3

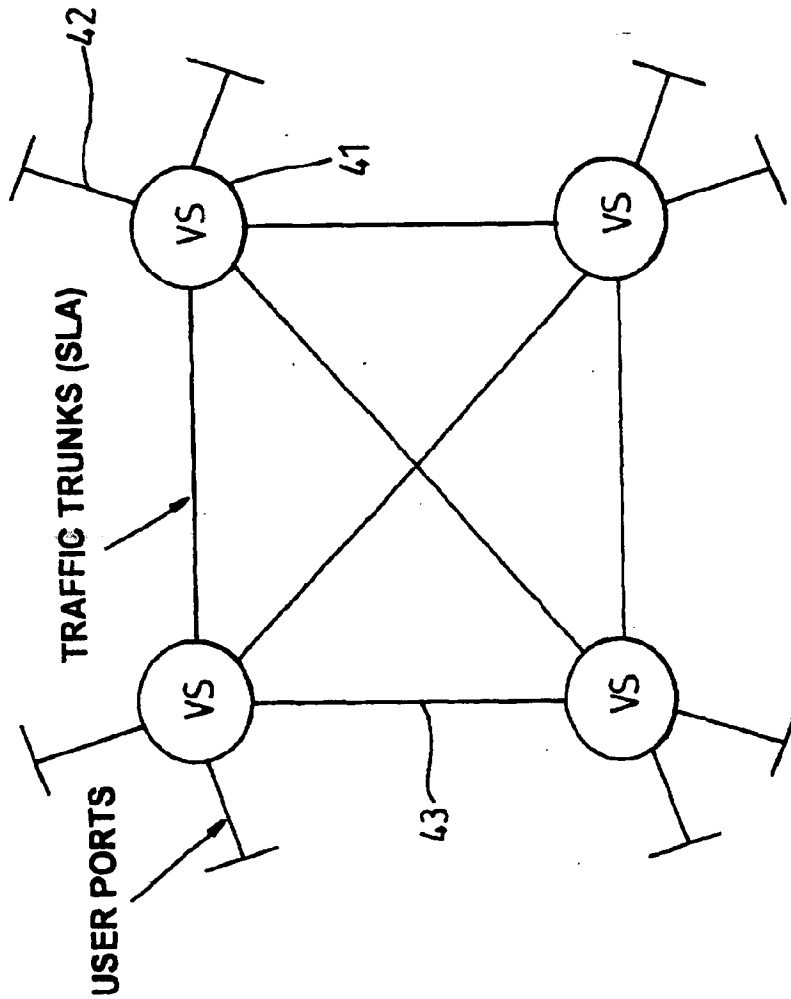


Fig. 4

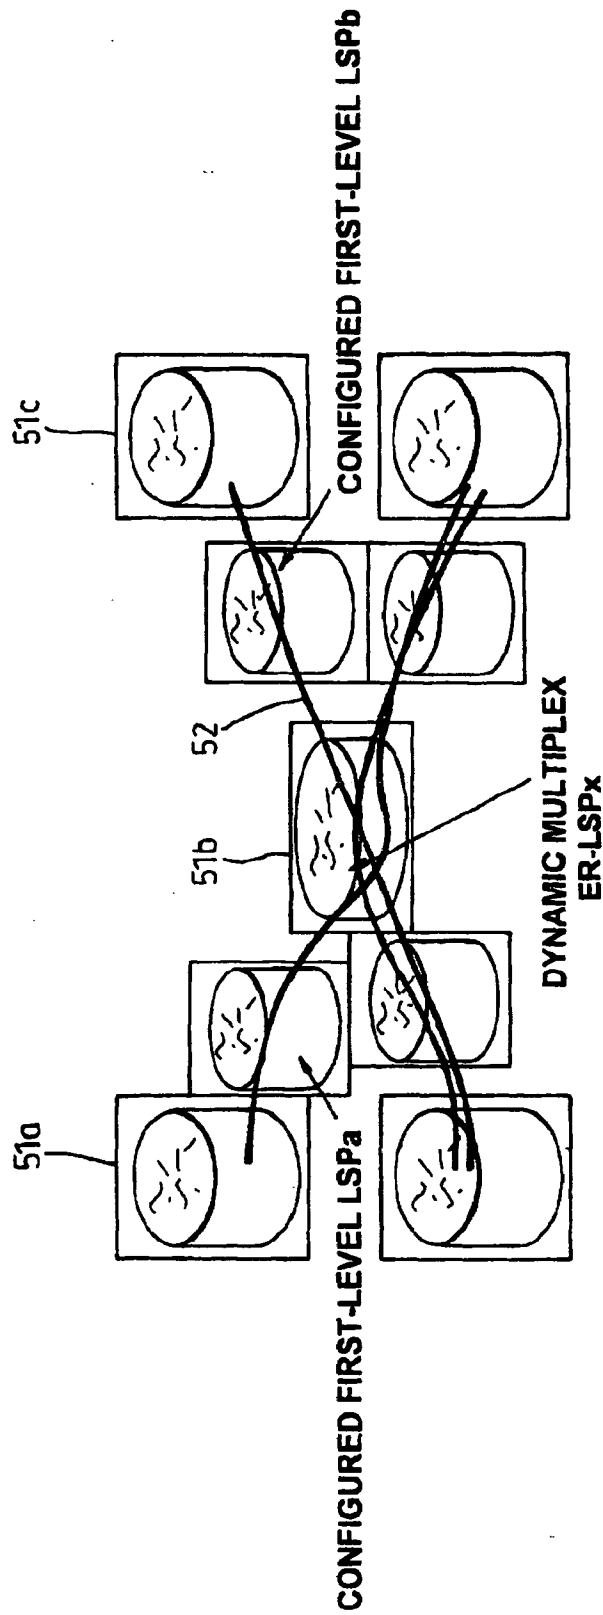


Fig. 5

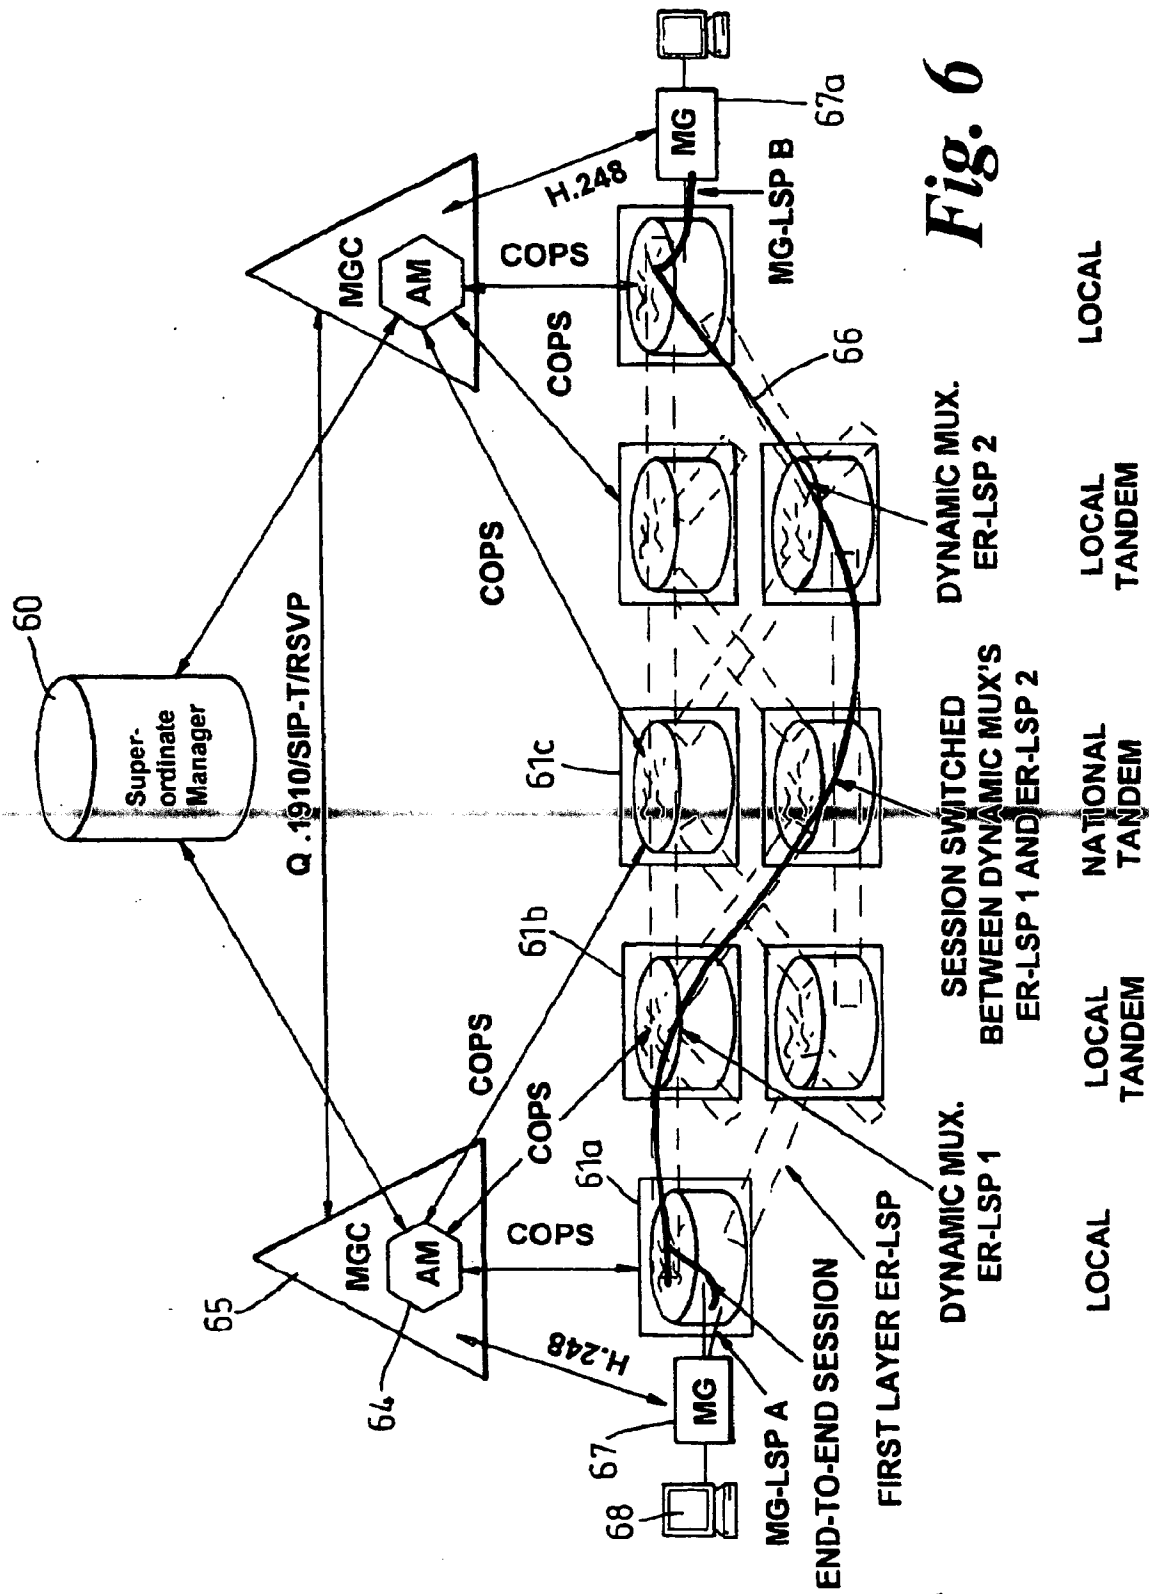


Fig. 6

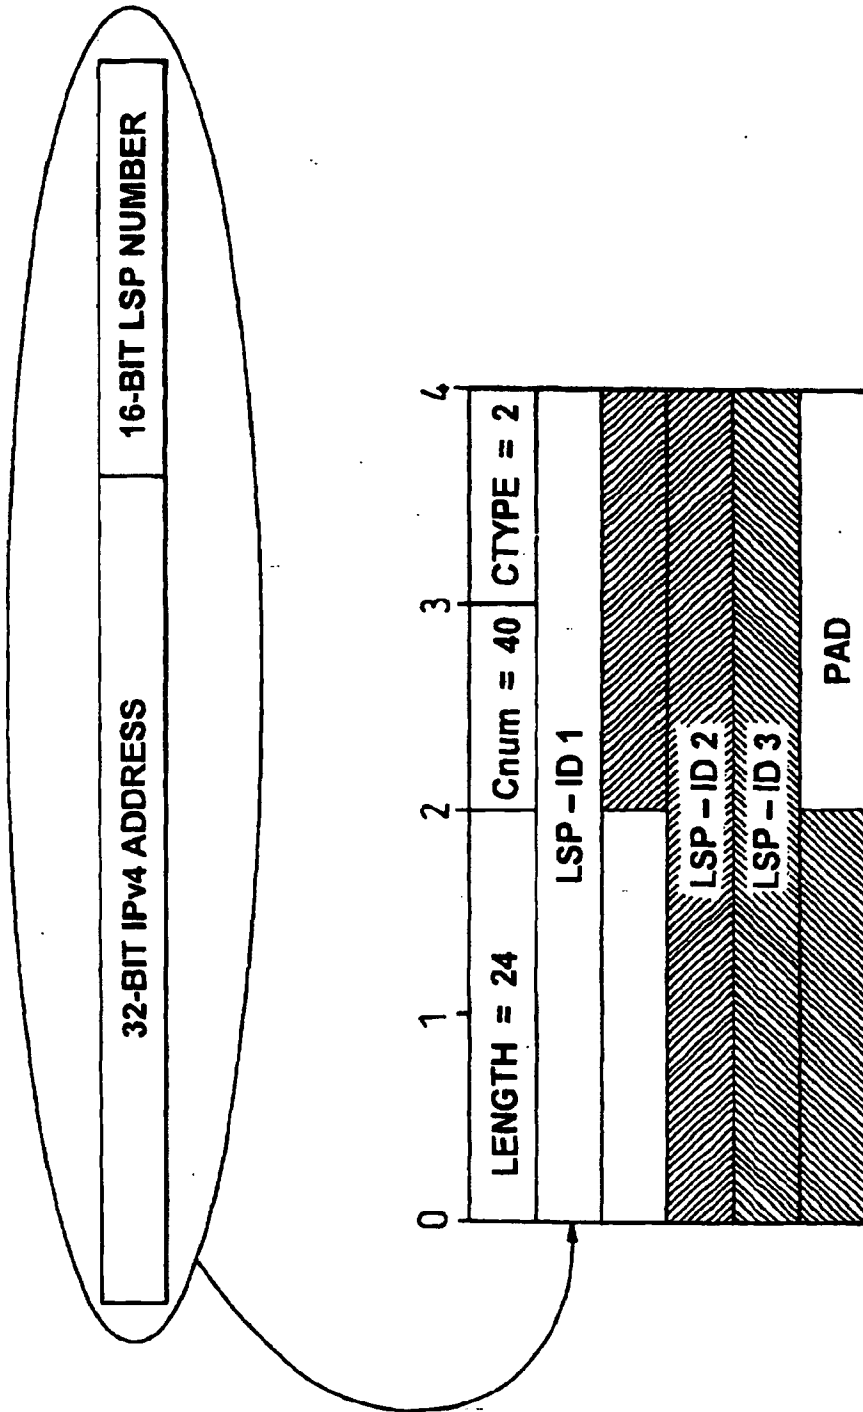


Fig. 7


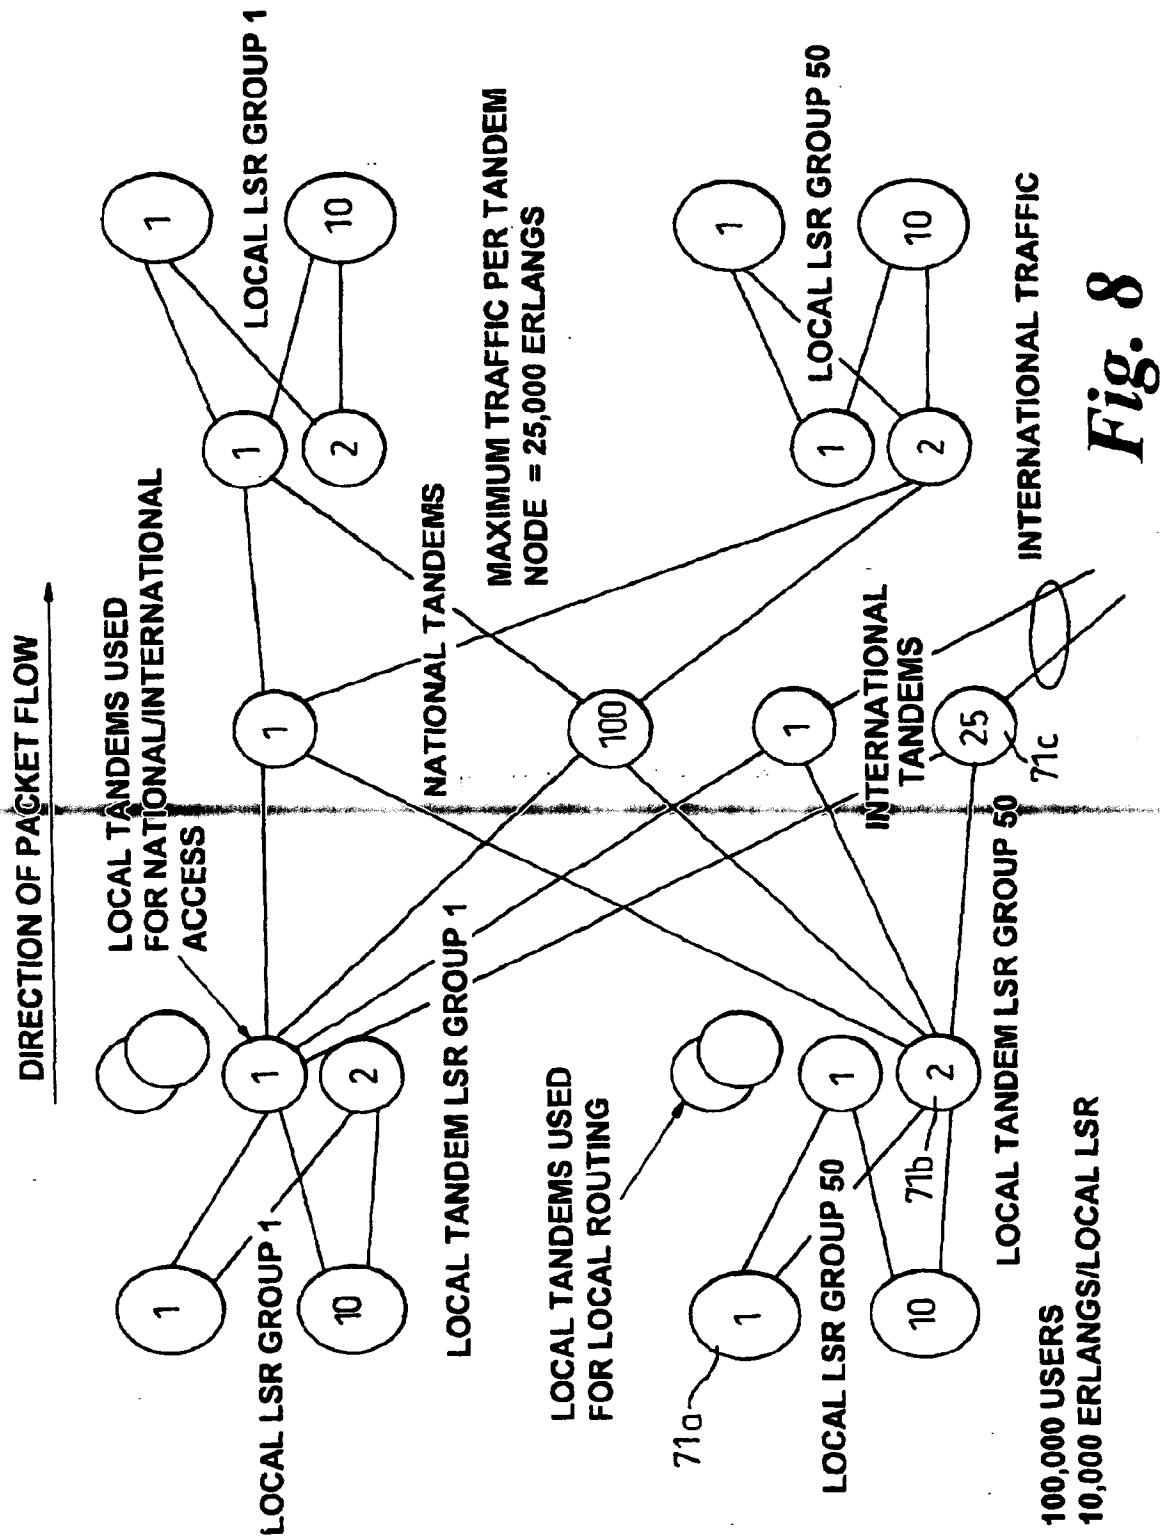


Fig. 8

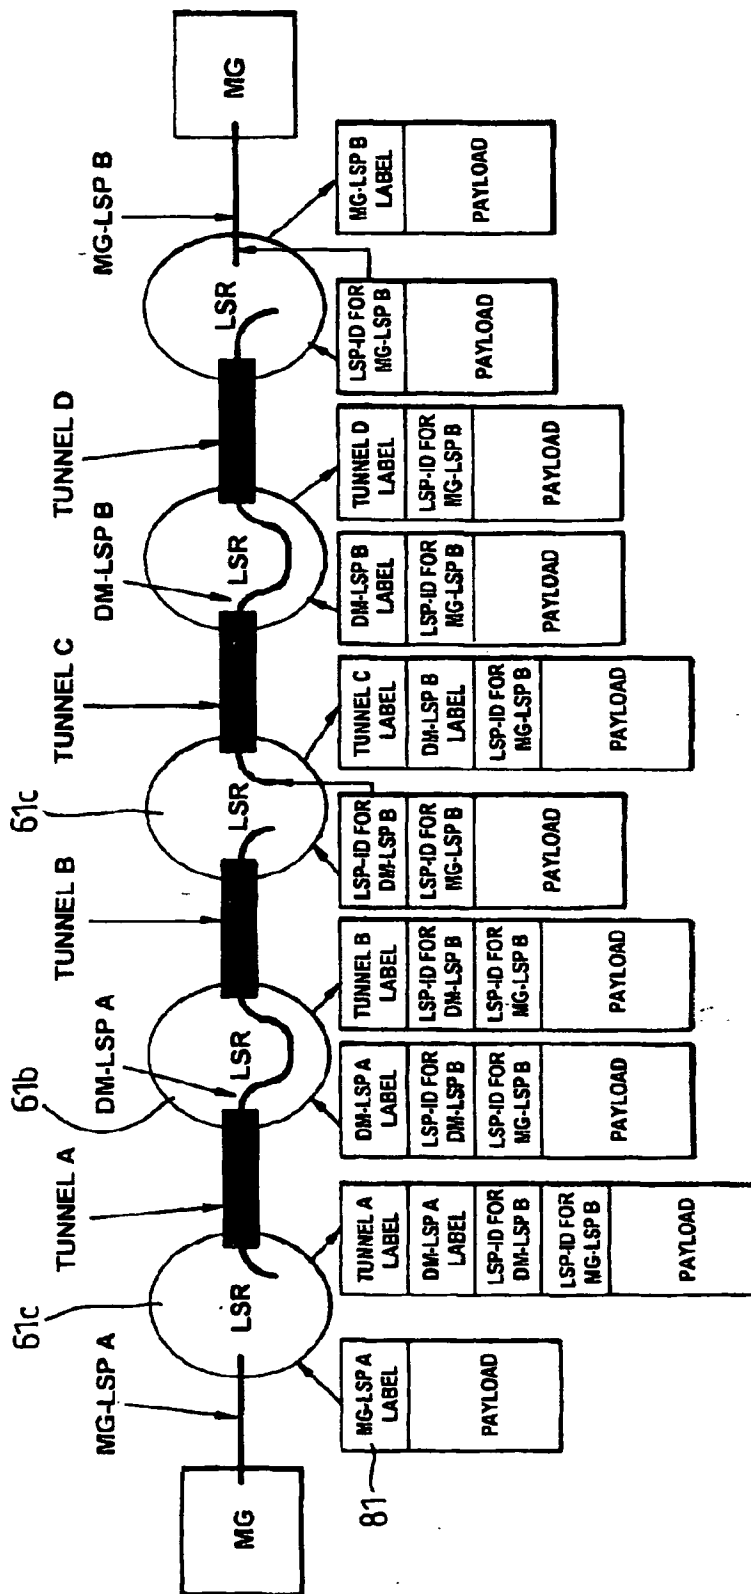

EACH TUNNEL IS ASSUMED TO PERFORM PENULTIMATE HOP
POPPING AT THE CORE LSR PRIOR TO THE VPN LSRs ILLUSTRATED
ABOVE

Fig. 9

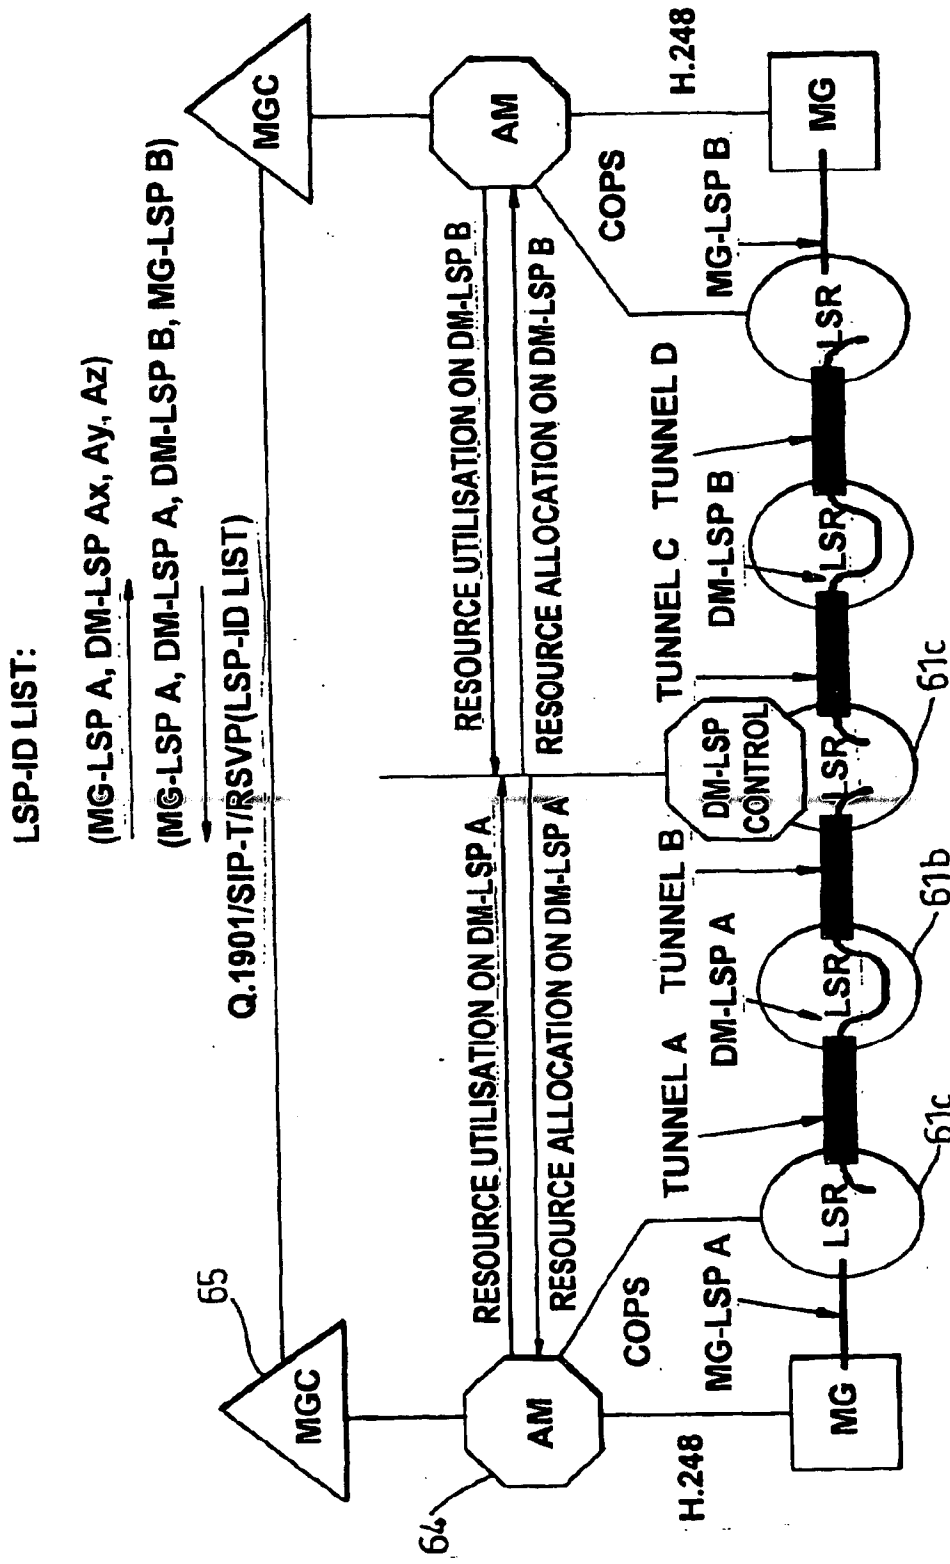


Fig. 10



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 30 5643

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	LE FAUCHEUR F: "IETF Multiprotocol Label Switching (MPLS) Architecture" IEEE INTERNATIONAL CONFERENCE ON ATM, XX, XX, 22 June 1998 (1998-06-22), pages 6-15, XP002115225 * paragraph [01.1] * * paragraph [02.4] * * paragraph [02.6] * * paragraph [2.15] * * paragraph [2.18] * * paragraph [2.21] *	1-4, 10-12, 14,15, 18-20	H04L12/56
A		5-9,13, 16,17	
X	ROSEN E ET AL: "BGP/MPLS Virtual Private Networks" IETF REQUEST FOR COMMENTS, XX, XX, 1 March 1999 (1999-03-01), pages 1-21, XP002163535 * abstract * * paragraph [4.2.2] *	10,21	
X	VISWANATHAN A ET AL: "EVOLUTION OF MULTIPROTOCOL LABEL SWITCHING" IEEE COMMUNICATIONS MAGAZINE, IEEE SERVICE CENTER, PISCATAWAY, N.J, US, vol. 36, no. 5, 1 May 1998 (1998-05-01), pages 165-173, XP000752861 ISSN: 0163-6804 * abstract * * page 167 - page 168 * * page 170 *	1,14,18	H04L
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 10 January 2002	Examiner Figiel, B

CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone
Y : particularly relevant if combined with another document of the same category
A : technological background
O : non-written disclosure
P : intermediate document

T : theory or principle underlying the invention
E : earlier patent document, but published in, or after the filing date
C : document cited in the application
I : document cited for other reasons

& : member of the same patent family, corresponding document

EPC FORM 1501 (01/02) (P4CJ1)

This Page Blank (uspto)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)